




# INDUSTRIAL WASHER EXTRACTOR SERIES WHS



Made in Italy with Italian Fashion Mind

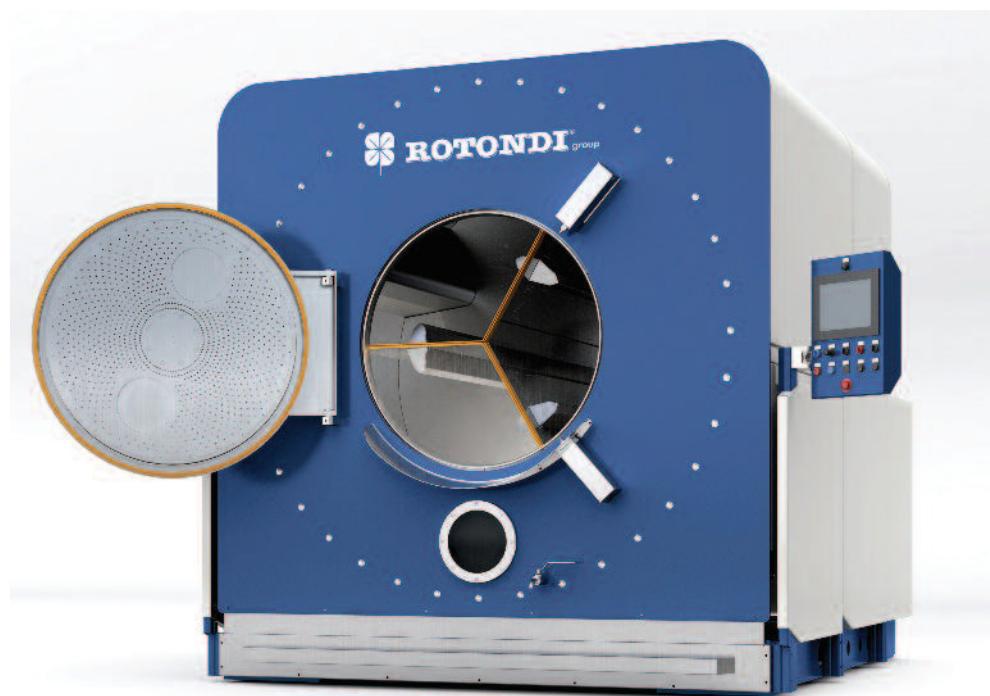

## Main characteristics:

The ROTONDI soft mount high spin washer extractor, was born from a project which combine high performance with an effective construction design .

The result is an optimization of the spaces and reduction of "liquors ratios", with a simplification of all the manufacturing and maintenance processe .

Technical specification:

- Basket with 1 / 2 or 3 compartments upon request
- Simple maintenance thanks to the external assembly of the basket cushions shaft.
- Variable basket rotation speed between 0 – 600 rpm
- Stainless steel 4 compartments products dispenser
- Anti-injury CE approved protection
- Electrical board integrated with the machine with adjustable touch screen terminal and diagnostic software
- Low electrical absorption and not glitches thanks to the installed inverter

Technical data	Mod WHS120	Mod WHS 230	Mod WHS 300	Mod WHS 450
<b>Basket diam.</b> mm	1355	1545	1805	1910
<b>Basket deep</b> mm	870	1250	1360	1600
<b>Basket volume</b> lt	1250	2340	2980	4580
<b>Load capacity Ratio1/10</b> kg	125	230	300	450
<b>Loading door</b> mm	700	990	990	990
<b>Hot-cold water entry</b> inch	1"	2"	2"	2"
<b>Steam inlet</b> inch	1"	1 ¼ "	1 ¼ "	1 ¼ "
<b>Steam consumption</b> kg/h	240	430	580	850
<b>Spin extraction</b> rpm	0 – 600	0 – 570	0 – 540	0 – 540
<b>G - Force</b>	300	300	300	300
<b>Max. air pressure</b> bar	6	6	6	6
<b>Max. steam pressure</b> bar	10	10	10	10
<b>Max. water pressure</b> bar	5	5	5	5
<b>Electric power</b> kW	18,5	22,5	30	40
<b>Electric voltage</b>	400V3Ph50Hz	400V3Ph50Hz	400V3Ph50Hz	400V3Ph50Hz
<b>Drainage Ø</b> mm	DN 150	DN 150	DN 200	DN 200
<b>Height</b> mm	2000	2300	2400	2500
<b>Width</b> mm	2200	2400	2500	2500
<b>Depth</b> mm	2200	2800	2800	3000
<b>Weight</b> kg	3500	4200	7200	8000

P.S. Steam and water consumption are always to be checked depending on the customer needs and central supply installations .

## Options:

- Single or double tilting
- Double passing door
- Control production printed ( for double passing door type only )
- Humidity control
- Variable speed
- Automatic loading and unloading system
- Axial air circulation device



**ROTONDI group Srl**  
Via Fratelli Rosselli, 14/16  
20019 Settimo Milanese (Milano) - Italia  
Tel. (+39) 02.335.01.224 - Fax (+39) 02.335.01.329  
E-mail: rotondi@rotondigroup.it  
www.rotondigroup.com

Agente: